


CONNECT & PROTECT

# CLEAR FLEXIBLE ADHESIVE-LINED HEAT SHRINK TUBING FROM GROTE

▶▶ ORDER YOURS TODAY!

- Provides visual assurance that the connection is installed properly
- Shields against moisture intrusion, while also protecting against chemicals and abrasion
- The outer wall is semi-rigid, cross-linked polyolefin, while the inner wall is an adhesive lining that flows with the application of heat
- The clear, moisture resistant tubing provides flexibility to insulate and protect irregularly shaped products and connections

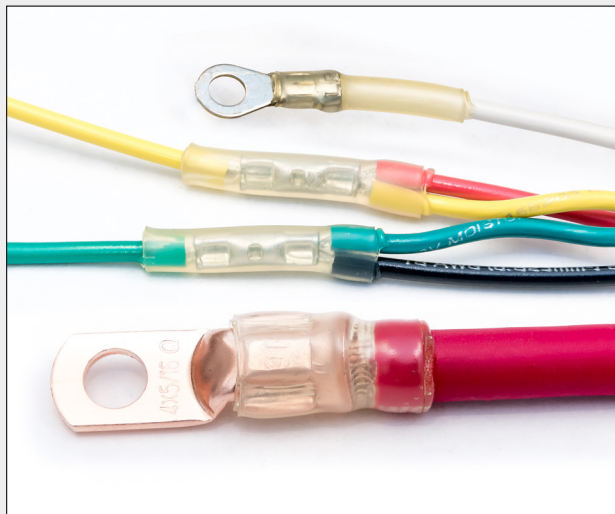

### TECHNICAL SPECIFICATIONS

- Material:** Cross linked Polyolefin
- Color:** Clear
- Operating Temperature:** -40°C to 110°C (-40°F to 230°F)
- Shrink Temperature:** 80°C (176°F)
- Length:** 6"
- Standards:** UL E35586, CSA LR31929
- Pack Quantity:** 6
- Shrink Ratio:** 3:1
- Post Heat Form:** Semi-Flexible
- Outer Wall Construction:** Flexible
- Inner Wall Construction:** Adhesive Lined
- Moisture Resistance:** High
- ROHS:** Yes
- Type:** Dual Wall



PART #	DESCRIPTION	SIZE	LENGTH	PACK SIZE
<b>HEAT SHRINK TUBING, 3:1 SHRINK RATIO</b>				
84-5029	HEAT SHRINK TUBING, 3:1, DUAL WALL, CLEAR	1/8"	6"	6
84-5030	HEAT SHRINK TUBING, 3:1, DUAL WALL, CLEAR	3/16"	6"	6
84-5031	HEAT SHRINK TUBING, 3:1, DUAL WALL, CLEAR	1/4"	6"	6
84-5032	HEAT SHRINK TUBING, 3:1, DUAL WALL, CLEAR	3/8"	6"	6
84-5033	HEAT SHRINK TUBING, 3:1, DUAL WALL, CLEAR	1/2"	6"	6
84-5034	HEAT SHRINK TUBING, 3:1, DUAL WALL, CLEAR	3/4"	6"	6
84-5035	HEAT SHRINK TUBING, 3:1, DUAL WALL, CLEAR	1"	6"	6
<b>TOOLS</b>				
83-6525	HEAT SHRINK GUN, BUTANE POWERED, STAND UP			1



**DON'T FORGET A FLAMELESS OR HANDS-FREE HEAT SHRINKING TOOL**

**EZ-FIND**  
 SCAN CODE FOR MORE INFO  
 BALAYER LE CODE POUR DE PLUS  
 AMPLES RENSEIGNEMENTS  
 ESCANEAR CÓDIGO PARA  
 VER MÁS INFORMACIÓN



**FOR MORE INFORMATION  
 VISIT OUR WEBSITE.  
 GROTE'S GOT IT!**



230 Travail Rd, Markham,  
 Ontario, Canada L3S 3J1  
 Tel: 800.268.5612  
 US: 800.628.0809  
 www.grote.com